


In film processing, the precise flow rate and volume of the photographic solution is required. By combining the appropriate Data Industrial flow sensor with the model 2101 dual channel flow monitor, high accuracy and repeatability are obtained. This particular system provides two 4-20mA proportional output control signals that are computer compatible. The computer, in turn, maintains the desired flow rate by controlling electronically actuated ball valves. As the flow increases above the desired rate, the control valve opening decreases and vice versa. The model 2101 can also provide serial communication signals via RS-232 or 485 configurations.



DAB-059-01

1-09

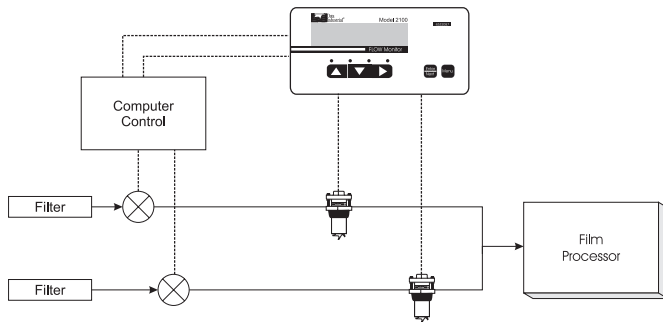

Please see our website at www.badgermeter.com for specific contacts.

Copyright © Badger Meter, Inc. 2009. All rights reserved.

Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists.



BadgerMeter, Inc.

6116 E. 15th Street, Tulsa, Oklahoma 74112

(918) 836-8411 / Fax: (918) 832-9962

www.badgermeter.com

