


Model Hi-Lo Harness	For Compound Series with 2 RTRs	Technical Brief
--------------------------------	--	----------------------------

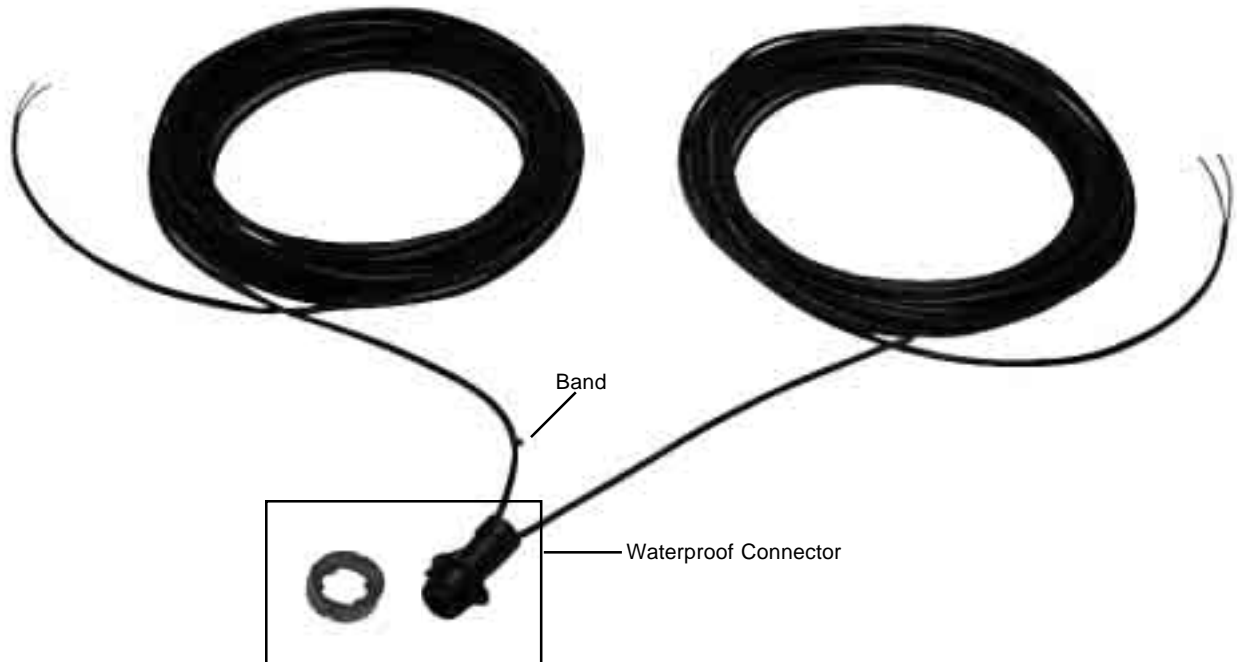

DESCRIPTION

APPLICATION/OPERATION: The Hi-Lo Harness is a product designed to work with the (2) Recordall® Transmitter Registers (RTR®) for the Recordall Compound Series Meter.

When connected to the output connector from the (2) RTRs, it provides two (2) separate output signals. One signal is the equivalent totalization from the high side (turbo) of the meter and the other is the equivalent totalization from the low side (disc) of the meter. This harness helps provide remote separate totalization information as is on the (2) meter mounted RTR Registers.

MOUNTING: The Hi-Lo Harness is attached to the (2) RTR output using a waterproof connector.

TEMPERATURE: Operating range is 0°C to 60°C (32°F to 140°F). The water meter should not be subjected to temperatures below freezing.

ELECTRICAL: 22 gauge stranded twisted pair conductors. Conductors are shielded including a drain wire. Red conductor is positive polarity. Black conductor is negative polarity.

WIRING: There is a band attached to the wire for the high flow to assist in identification for wiring.

SPECIFICATIONS

Resolution 1/10th of Test Circle of RTR
Standard Cable Length 75 Feet

Recordall® and RTR® are registered trademarks of Badger Meter, Inc.

HLH-T-34

10-03



Please see our website at
www.badgermeter.com
 for specific contacts.

Copyright © Badger Meter, Inc. 2003. All rights reserved.

Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding bid obligation exists.



BadgerMeter, Inc.

P.O. Box 245036, Milwaukee, WI 53224-9536
 (800) 876-3837 / Fax: (888) 371-5982

www.badgermeter.com