

# BadgerTouch™ Automated Meter Reading System

## BadgerTouch™ Pit Module

# Installation Data

### REQUIRED TOOLS

62658-000 Torx® Screw Driver (10 bit)

### REQUIRED MATERIAL

62919-002 BadgerTouch Installation Kit includes:  
62307-002 Pit Tube, Coil Nut  
62825-001 Pit Tube, Locknut  
62308-001 Tamper Plug  
62820-001 Mounting Clip (Dual Pit Only)  
16279-000 Seal  
26017-009 Seal Wire

### IDENTIFICATION

Badger Meter BadgerTouch Pit Modules are available in a single module configuration for easy adaptation to the complete Badger Recordall® Disc, Turbo Series, and Compound meter lines. The single pit design offers a factory prewired BadgerTouch module to the Absolute Digital Encoder (ADE™).

Each BadgerTouch Pit Module can be identified using the eight-digit unique identification number located on the underside of the ADE lid. Each ADE is clearly identified on the face of the register with an assembly number, unit of measure, and meter model number (see figure 1).



Figure 1 Identification - Absolute Digital Encoder

### INSTALLATION

#### UNPACKING

Carefully remove the prewired BadgerTouch Pit Module and ADE(s) from the shipping carton and inspect the assembly for any damage. Retain the contents of the installation kit for use in securing the Pit Module to the pit lid cover.

### LOCATION

To ensure proper operation of the BadgerTouch on-site meter reading system, the BadgerTouch Pit Module should be mounted through a predrilled hole in the pit lid. Minimum hole diameter required is 1 3/4". The Pit Module contains electronic circuitry that is totally encapsulated to enhance reliable performance in most locations, under most conditions.

### PIT MODULE INSTALLATION

The BadgerTouch Pit Module (see Figure 2) is shipped prewired to the ADE for single pit configurations. Due to the factory prewired shipment, there is no splicing required and only the mounting of the register with tightening of the Torx seal screw is necessary. Excess wire should be coiled up inside the pit and cable tied to avoid any damage.

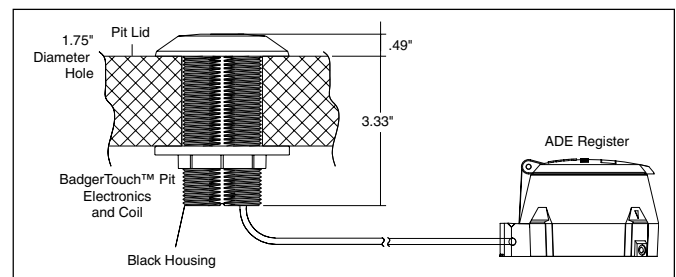


Figure 2 Identification - BadgerTouch Pit Module

### ADE INSTALLATION

Install the ADE on the water meter and secure it using either the Torx screw or standard seal screw provided.

### TESTING

Once the BadgerTouch Pit Module is secured through the pit lid and the ADE has been mounted on the water meter, the BadgerTouch system is ready for operation. No specific testing is required at the meter location regarding proper connections. Interrogation of each module will ensure that proper coordination of meters, modules, and account have occurred. The Symbol® Data Collector or other equivalent reading device should be used for interrogation of the installed BadgerTouch modules.

### LICENSE REQUIREMENTS

This device complies with Part 15 of the FCC Rules. Operation of this device is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes made by the user not approved by Badger Meter can void the user's authority to operate the equipment. No license is required by the utility to operate a BadgerTouch meter reading system.

TORX® is a registered trademark of Camcar, Division of Textron, Inc. Recordall® and RTR® are registered trademarks of Badger Meter, Inc. ADE™ and BadgerTouch™ are trademarks of Badger Meter, Inc.

**BT-I-02**  
P/N 64764-004 Rev. 1

9-03



Please see our website at  
[www.badgermeter.com](http://www.badgermeter.com)  
for specific contacts.

Copyright © Badger Meter, Inc. 2003. All rights reserved.



**BadgerMeter, Inc.**

P.O. Box 245036, Milwaukee, WI 53224-9536  
(800) 876-3837 / Fax: (888) 371-5982

[www.badgermeter.com](http://www.badgermeter.com)